

Leonardo Series

HIGH PRESSURE HOMOGENIZERS AND PLUNGER PUMPS SINCE 1974

Model HA/PA52

Leonardo Series



MODEL TABLE | MAXIMUM CAPACITY (l/h)* LINKED TO THE RELATED PRESSURE (bar)

MODELS	POWER kW	PRESSURE bar	150	200	250	400	600	1000	1200	1500
HA/PA52	250	CAPACITY l/h	37.500	34.000	27.000	15.000	11.000	5.000	4.300	3.200

*Values referring to products with a max viscosity of 500Cp


TECHNICAL DATA

Plunger number	5
Stroke (mm)	100
Weight (Kg)	8000
Water consumption (l/h)	300
Lubrication oil quantity (kg)	60
Connection product inlet/outlet	Socket weld flange \varnothing i102 / \varnothing o70

Design according to MACHINE DIRECTIVES and the HARMONIZED EUROPEAN STANDARD in force.



Model HA/PA52

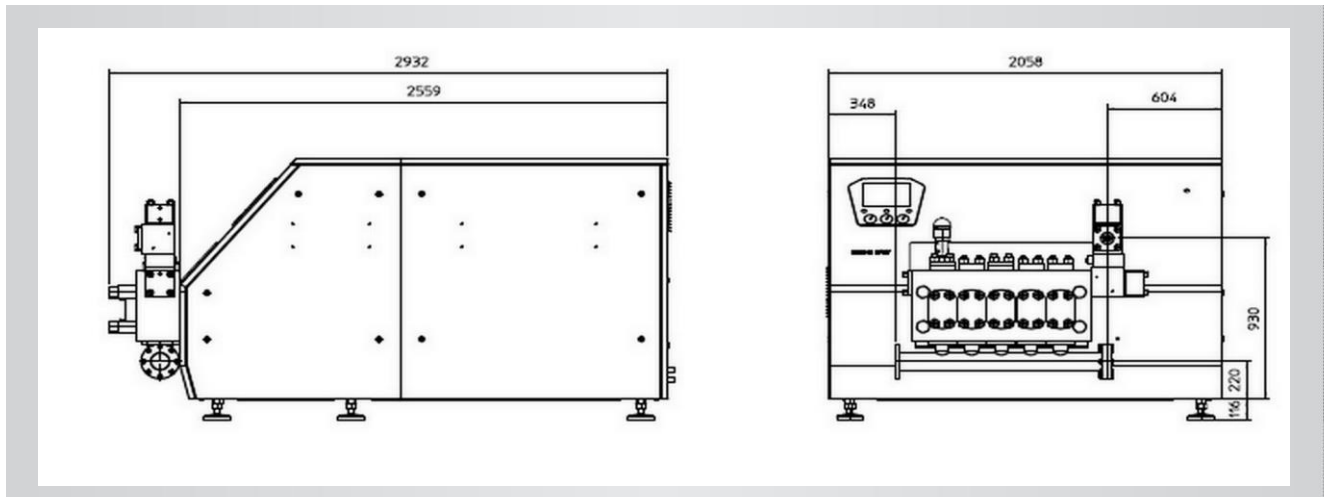

FEATURES

Forged block made of Duplex, SAF2205, Self-alignment patented system, 5 Plungers made of AISI630L covered by chrome

Double stage transmission system with pendular gear reducer and trapezoidal belts and pulleys

Homogenizing group with hydro-pneumatic adjustment of the pressure for a great stability and homogenizing valves in stellite™

Conical valve seat and poppet valves made of stellite 20™

Overpressure valve, flow switch alarm on water circuit

Digital pressure transmitter, 4-20 mA, with ceramic membrane

Forced lubrication system with pressure switch, cast iron crankcase with supporting roller bearings

Terminal box and control panel for local/remote control

Friendly maintenance of the liquid end

Vibration monitoring and temperature sensor on the crankcase and on the gear box

OPTIONS

Second stage homogenizing group

Forged multi-block made of Super Duplex, SAF2507

Aseptic execution

- Sterile water generator by means of condensed steam generator
- Patent pending sterile water generator by means of microfiltration

Design suitable with: 3A, EHEDG or PHARMA

- Low roughness and electropolished wetted parts
- cGMP certificates to add to Customer Pharma Manual

Standard or Sharp Edge Homogenizing valve with different geometries, materials availability:

- Tungsten carbide
- Zirconia Oxide
- High efficiency patented homogenizing valve "Margherita"

Seat valve made of Tungstene carbide

Sound-proof design

Pumping plungers availability:

- HVOF chromium carbide jet coat treatment
- AL2O3, Integral ceramics

Electric power board

- for Fixed or Variable capacity
- Remote Control by 4-20 mA signal
- Fully Automatic pressure control by means of PLC

Inlet and outlet connections:

- DIN 11851, Tri-clamp, SMS
- High pressure outlet
- Option upon request

Explosion proof design

